

04/30/2001 MON 11:28 FAX 253 612 6120


STATE FARM CIOS

0005

0003

925A-0174-1/2
ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM



04-253-16

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance deductibles requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances. It does not constitute the proper insurance policy. Refer to your agent for a copy of the Flood Insurance Manual or National Flood Insurance Program Instructions for completing this form can be found on the following pages 21

SECTION A PROPERTY INFORMATION

Insured Name Don + Janet Stamp	Address 1670 ROSALIND	City ANCHORAGE	State ALASKA	Zip 99507
Street Address (including Apt. No. and other No. House or P.O. Box) and Section LOT 16 BLOCK 3 DORA III SUBD.	Other Description (including other No. House or P.O. Box) LOT 16 BLOCK 3 DORA III SUBD.			

SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. Community Number 020005	2. Panel Number 0243	3. Section C	4. Date of Issue 3/5/00	5. Flood Zone A1	6. Base Flood Elevation 212.0
--------------------------------------	--------------------------------	------------------------	-----------------------------------	----------------------------	---

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevation (BFE): NGVD '29 or other datum of state
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building, indicate the community's BFE: feet NGVD or other datum - see Section E, item 7.

SECTION C BUILDING ELEVATION INFORMATION

- Using the Elevation Certificate Instructions, indicate the elevation number type the diagrams found on Pages 5 and 6 that best describe the building's reference level: **1**
- FIRM Zone A-1, A-2, A-3, A-4, A-5, or A-6 with BFE. The top of the reference level floor from the indicated diagram is at an elevation of **213** feet NGVD or other datum - see Section E, item 7.
- FIRM Zone V1-V2, VE, or V with BFE. The bottom of the lowest finished structural member of the reference level from the indicated diagram is at an elevation of **213** feet NGVD or other datum - see Section E, item 7.
- FIRM Zone A (without BFE). The floor level at the reference level from the indicated diagram is feet above or below below below the highest grade adjacent to the building. Is the building's lowest floor permanent level consistent with the community's floodplain management ordinance? Yes No Unknown
- Indicate the elevation datum system used in determining the above reference level elevations: NGVD '29 or other datum of state (NOTE: If the elevation datum used in determining the elevations is different than that used on the FIRM (see Section E, item 7), you must so indicate on the elevation certificate and on the FIRM and show the correction applied under Comments on Page 2.)
- Elevation reference mark used appears on FIRM: Yes No (See instructions on Page 4)
- The reference level elevation is based on: actual construction construction drawings (NOTE: Use of construction drawings is only valid if the drawings show that you have the reference level floor in place in which you can be confident will only be used for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
- The elevation of the lowest grade immediately adjacent to the building is: **213** feet NGVD or other datum - see Section E, item 7.

SECTION D COMMUNITY INFORMATION

- If the community official responsible for verifying building elevations accepts the reference level indicated in Section C, item 1 as the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is: feet NGVD or other datum - see Section E, item 7.
- Date of the start of construction of building elevation: _____

NOTHING ON BACK

CIOS - MICROGRAPHIC SENT
APR 30 2001

CIOS - MICROGRAPHIC RECEIVED
APR 30 2001

04/30/2001 MON 11:28 FAX 253 912 6120

STATE FARM CIOS

006

002

MAY - APR 24 '99 12:03PM BUREAU HOME MORTGAGE INC.

92 SA-0174.1/2



SECTION B CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AM, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide elevation information may also sign this certification. In the case of Zones AE and A (without a FEMA of community issued BFE), a building official, a property owner, or an owner's representative may also sign this certification.

Reference level diagrams B, F and H - Distinguishing Features-If the contractor is unable to certify to distinguish between temporary and enclosure size, location of servicing equipment, area use, wall openings, or undisturbed area features, then list the features and include in the certification under Comments below. The diagram number, Section C, item 1, must also be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to complete the data available. I understand that any false statements may be punishable by fine or imprisonment under 18 U.S. Code, Section 1007.

CERTIFIER'S NAME: KENNETH L. DREYER LICENSE NUMBER: LS-9202


TITLE: SEC/TRE COMPANY NAME: LANTSCH

ADDRESS: 440 W BRUNSON #103 CITY: ANCHORAGE STATE: ALASKA ZIP: 99503

COMMENTS: See above PHONE: 572-1173 FAX: 907-562-5271

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: VERTICAL DATUM IS GREATER ANCHORAGE AREA BORDER, POST QUAKE, U.S. COASTAL AND GEODETIC SURVEY, MEAN SEA LEVEL OF 1972 (FOR FIRM AND THIS SURVEY)

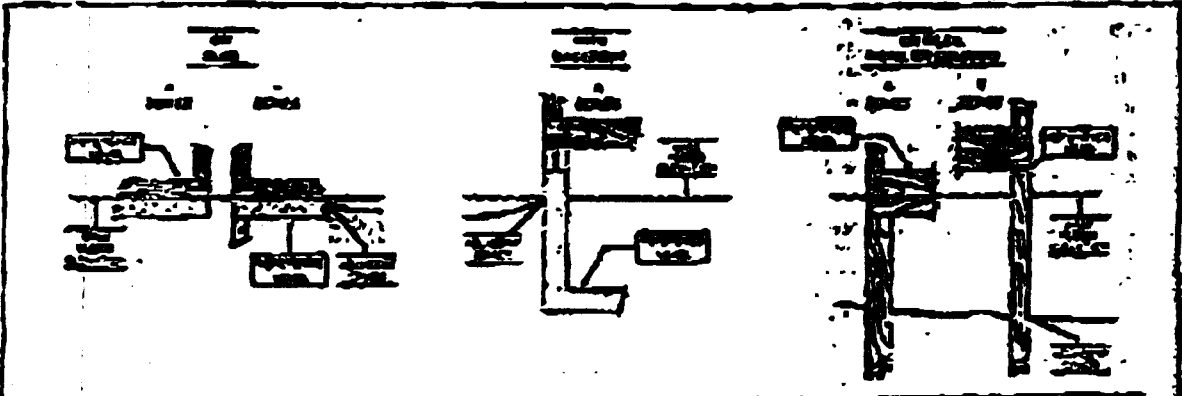

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest finished structural member.

See B-39

NOTHING ON BACK

CIOS - MICROGRAPHICS SENT
APR 30 2001

CIOS - MICROGRAPHICS RECEIVED
APR 30 2001