## **ELEVATION CERTIFICATE**

O.M 8. No 3067 0077 Expires May 31, 1993

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

007-094-30

TTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to setermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMA). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION			FOR INSURANCE COMPANY USE		
BUILDING OWNER'S NAME	POLICY NUMBER				
LEGACY I tomes J					
STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR PO. ROUTE AND BOX NUMBER			l	COMPANY NAIC NUMBER	
3919 CFflecti	on De	UE		<u> </u>	
OTHER DESCRIPTION (Lot and Black Numbers, etc.)  LOT 3 BLOCK 7 EASTLA	IKE GNB	D. ADDN. NO.	<u>_</u>		
CITY	-	,	STATE	ZIP CODE	
ANCHORAGE			ALASKA	99504	
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
rovide the following from the proper FIRM (Sec	Instructions):				
1. COMMUNITY NUMBER 2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AQ Zones, use depth)	
020005 0242	B	09-18-87	Α	202.0	
Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):NGVD '29 ZOther (describe on back). For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE:'\( \frac{1}{2} \oldsymbol{\rho} \oldsymbol{\rho} \) feet NGVD (or other FIRM datum—see Section B, Item 7).					
SECT	ON C BUILDI	NG ELEVATION INFORM	IATION	•	
describes the subject building's reference leval. FIRM Zones A1-A30, AE, AH, and A (with of 2004) 19 feet NGVD (or other File). FIRM Zones V1-V30, VE, and V (with BFE) the selected diagram, is at an elevation of c). FIRM Zone A (without BFE). The floor used below (check one) the highest grade at d). FIRM Zone AO. The floor used as the reference) slevated in accordance with the combinate the elevation datum system used in under Comments on Page 2). (NOTE: If the the FIRM [see Section 8, Item 7], then convequation under Comments on Page 2.) Elevation reference mark used appears on Filestine	BFE). The top RM datum—see ). The bottom of d as the reference diacent to the bearence level from ding. If no flood munity's floodpi determining the elevation datur ent the elevation	Section B, Item 7). If the lowest horizontal strained level from the selected diagram is depth number is available above reference level elements to the datum system uses the datum system system uses the datum system sy	diagram isleet a leet a leet a e, is the building ce? Yes NGN elevations: NGN elevations is different filled and the FIRM	of the reference level from section B. Item 7).	
The reference level elevation is based on: (NOTE: Use of construction drawings is only pase this certificate will only be valid for the build be required once construction is complete. The elevation of the lowest grade immediately Section 8, Item 7).	valid if the build uilding during th .)	ding does not yet have the le course of construction.	e reference level A post-construc	tion Elevation Certificate	
SECTION D COMMUNITY INFORMATION					
If the community official responsible for verify is not the "lowest floor" as defined in the comfloor" as defined by the ordinance is:	munity's floodpl	lain management ordinani NGVD (or other FIRM datt	ce, the elevation	of the building s lowest	


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections 8 and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or impresonment under 18 U.S. Code. Section 1001.

JEFF A. GASTALDI	LS-6091	•				
CERTIFIER'S NAME		LICENSE NUMBER (or Affix Seal)				
OWNER	GASTALDI LAND S.	JEVE41N6				
TITLE	COMPANY NAME					
4726 W. 887H AV	E ANCHORAGE	ALASKA 9950-				
ADDRESS J.M. G. Sant	CITY 9-23-93	907-248-54-54				
SIGNATURE	OATE	PHONE				
COMMENTS:						
•	EM NO.7; - 1972 1	165 DATUM				
SECTION C: I	rem NO. 3 - 1972	VYS DATUM				

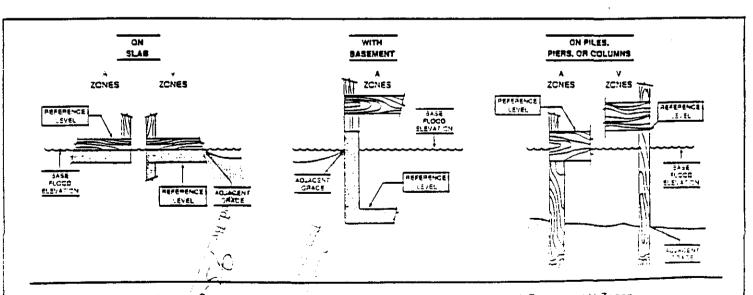

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones affould be measured at the dottom of the lowest horizontal structural members.